



EASY-OFF

Remote Control Socket

Instruction Manual

ES-AUS1005

Thank you for purchasing Watts Clever product.

EASY-OFF Remote Control Socket pack has been improved to include the PLUG & PLAY feature. They are all set up ready, you can simply enjoy it's beauty after open the packaging.

For any new socket or reconfiguration, please follow the procedure of [[How to Set Up](#)].



Notes on Safety



Caution

- Do not exceed the maximum load of 10A / 2400W either with a single appliance or with a group of appliance connected via a power strip.
- Do not plug 2 or more EASY-OFF Remote Control Socket together.
- For indoor use only.
- Always ensure the plug of any appliance is inserted fully into the EASY-OFF Remote Control Socket.


Clearing Codes

- With the EASY-OFF Remote Control Socket turned off hold down the OFF button on the remote transmitter channel for that socket for 3 seconds. The indicator light will flash slowly. Now press the ALL OFF button for 3 seconds, the indicator light will flash quickly and then return to a slow flash.
- You can now assign a new channel for the socket as described earlier.
- The remote control transmitter will work within a range of 20 meters from the standby control socket in an open space. As it is a radio frequency transmitter it will also work through walls, ceilings etc, but this will affect the maximum range of transmission.

Parts and Usage

How to Set Up

1. Insert the supplied battery into the battery compartment of the **Remote Control** making sure it is inserted correctly.
2. Plug the **Remote Control Socket** into your chosen electricity socket. The [**Indicator light 1**] will flash slowly. Point the **Remote Control** at the socket and then press the ON or OFF channel button in the [**Control panel 4**] that you wish to control that Remote Control Socket with. After 2 seconds the [**Indicator light 3**] on the socket will flash quickly and then return to a continuous light.
3. The code has now been successfully learned by the socket. You can now turn the socket on or off with the ON / OFF buttons in the [**Control panel 4**] from the channel number 1, 2, or 3 that you selected.

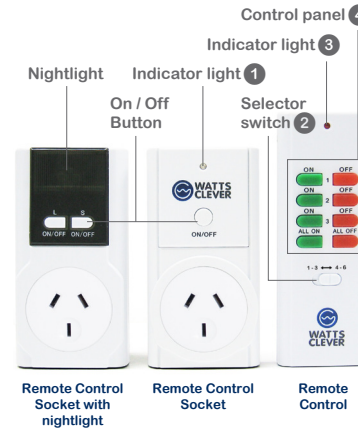

Operation

1. You can now plug the equipment you wish to control into the socket. This can either be an individual piece of equipment or a normal 2, 3, 4, or 6 way power strip (up to a maximum of 2400W load) can be connected so that you can control several pieces of equipment from a single **Remote Control Socket**.
2. Just simply turn the socket off and on when needed by pressing the buttons on the **Remote Control** that you have allocated to that particular socket. Also you can press the ALL ON or ALL OFF button to control all the sockets you have set up. Finally you can also press the ON / OFF button on the **Remote Control Socket** itself.
3. If you purchase additional **Remote Control Sockets** then you can operate many different sockets from the same remote control transmitter. Any number of sockets can be assigned to one of the channel numbers on the remote control unit. You have up to 3 separate channels on the **Remote Control** to control individual sockets or multiple sockets.

Product Specifications

Model • ES-AUS1003 / ES-AUS1005

Power rating • 240V AC 10A

Transmission frequency • 433.92MHz

20M range between the transmitter and the receiver in a straight line

Less than 0.5W power consumption for the socket when turned off

Watts Clever (International) Limited

Units 03-04, 9th Floor

69 Jervois Street,

Sheung Wan, Hong Kong

T +852 2815 6333

W www.wattsclever.com

© 2012 Watts Clever
(International) Limited

All Rights Reserved

Made in China

For more detailed instructions, FAQ'S, and product support please visit our websites.

www.wattsclever.com

www.blog.wattsclever.com

www.support.wattsclever.com